

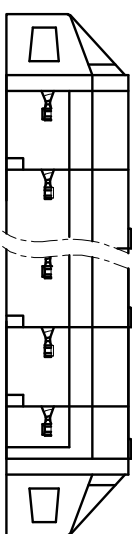
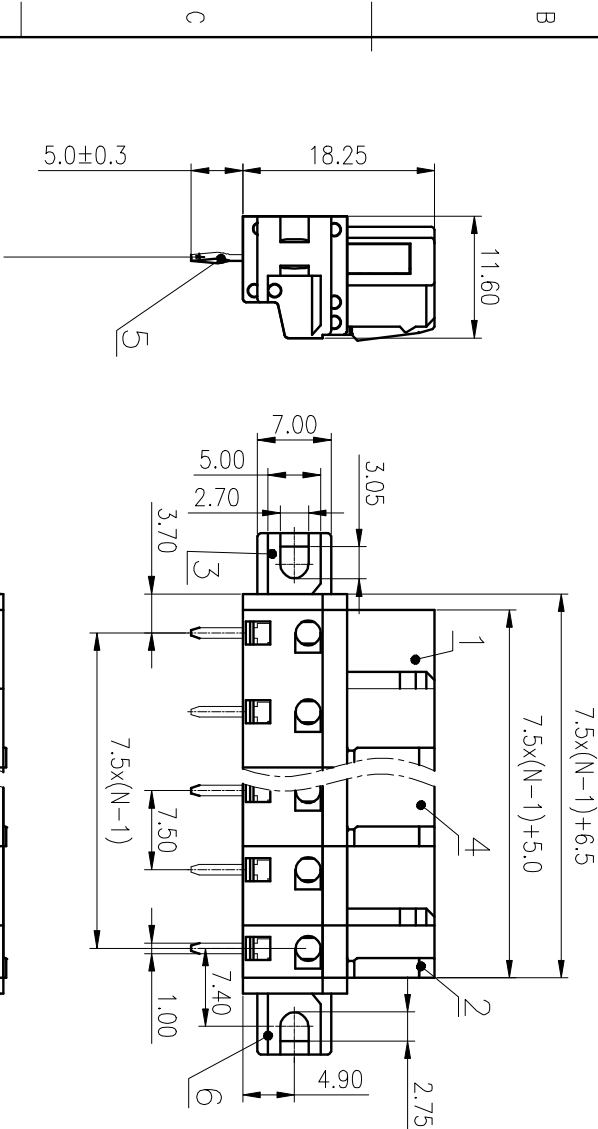
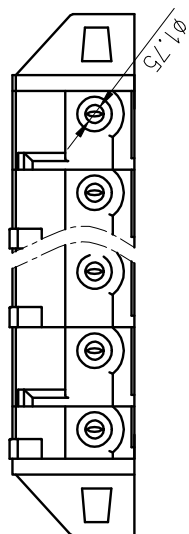



尺寸公差/General	公差范围(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			

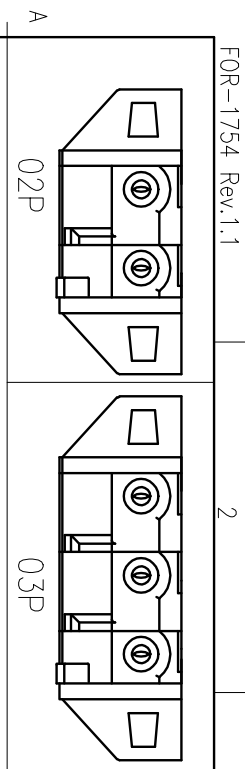

The first pin will bulge to the left

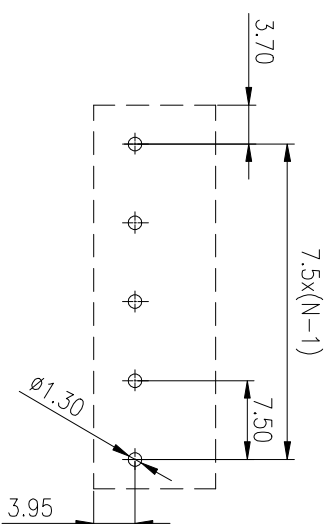

Bending the pin-header after assembling



ITEM	NAME OF PART	MATERIAL	NOTES
6	Right housing	PA66	UL94V-0
5	Clamp	Copper alloy	Sn Plated
4	Housing2	PA66	UL94V-0
3	Left housing	PA66	UL94V-0
2	Side housing	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

UL 标准	UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/75	/	/	300/70
IEC 标准 /IEC Standard:				
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2	
额定电压/电涌/Rated Voltage(V)/Current(A)	320/20	/	/	/
额定电压/电涌/Rated Voltage(V)/Rate Impulse Voltage(KV)	4.0	/	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	/	/	/	/
间距/Pitch(mm)/线数范围/Portes	7.5/N=N=02~12P			
剥线长度/Stripping length(mm)	6~7			
使用温度范围/Operating Temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			
标准颜色编号/Standard color number:	PANTONE 428C			
PANTONE / RAL				
SURFACE:	/			

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	
CHKD:	
DRT: WongY1	2020.06.19
DRAWING NO.:	8EDGDM-7.5-C02
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
SHEET:	1/1

DEGSON<sup>®</sup> NINGBO DEGSON ELECTRICAL CO., LTD  
宁波高松电子有限公司

NAME: 8EDGDM-7.5-XXP-11-01A(H)

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				
4				