


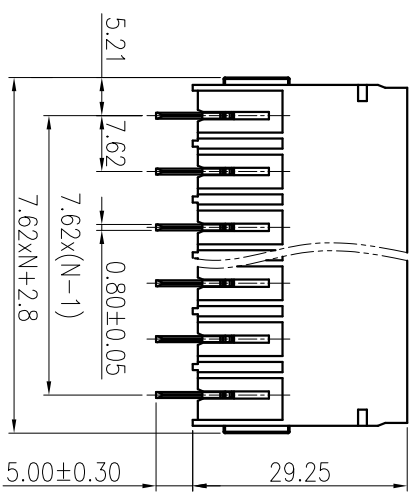
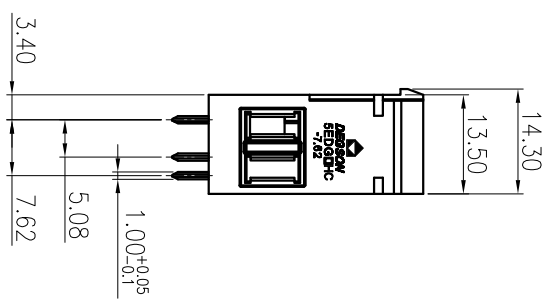


公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10					
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2					

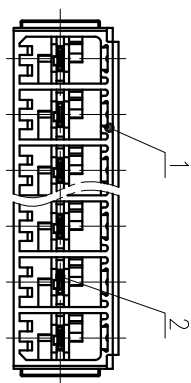

PCB LAYOUT

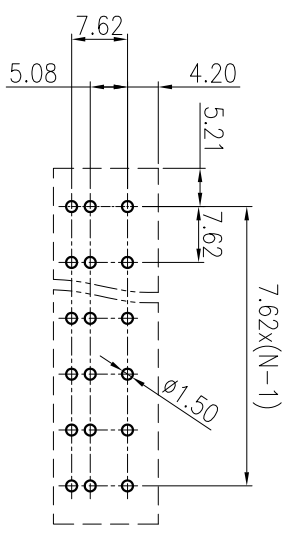

2	Pin header	Copper	Sn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage (V)/Current (A)	300/41	300/41	600/5
FC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage (V)/Current (A)	630/41	630/41	1000/41
额定脉冲电压 (KV)/Rate Impulse Voltage (KV)	6	6	6
间距/Pitch (mm)/线数范围/Poles	7.62	N=02~12P	
使用温度范围/Operating Temperature (°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /

SURFACE: /

MAT NO.: /

STATUS: /

APPD: LonCHH 2020.006.28

CHKD: GongYzh 2020.06.28

DRFT: XiaoShP 2019.05.09

NAME: **DEGSON** NINGBO DEGSON ELECTRICAL CO., LTD

5EDGVHC-7.62-XXP-1Y-00A(H)

DRAWING NO.: 10002380

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1	REV	SHEET
1								TO-2	1/1