


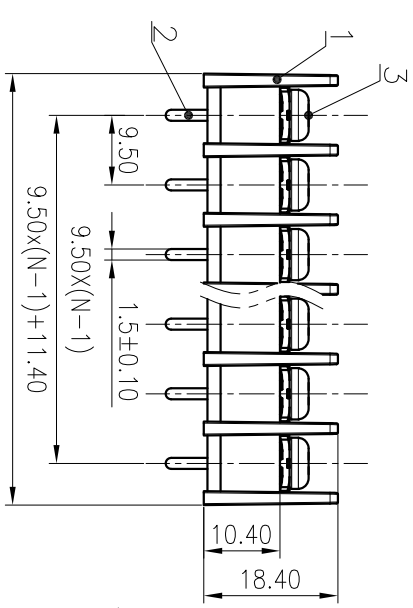

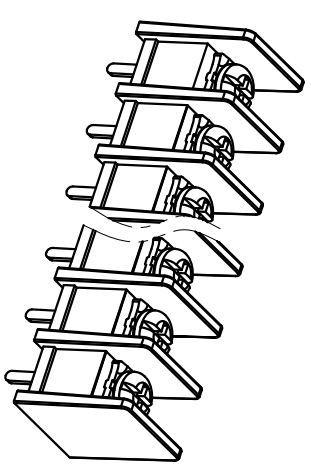


Pitch range in mm	Nominal dimension range					
	In mm	over	over	over	over	over
6 to 10	10	10	30	60	100	150
10 to 15	15	24	30	60	100	150
15 to 25	25	±0.2	±0.3	±0.5	±0.7	±1.0

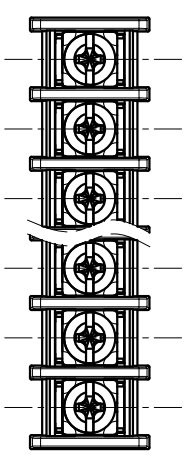

PCB LAYOUT

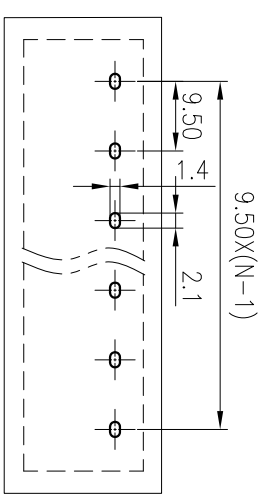

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/25	/	300/10
IEC 标准/IEC Standard:	/		
过压类别/Overvoltage Category/污秽等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/32	600/32	1000/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	6	6
额定扭矩/Torque Tightening(N·m/Lb·in)	M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.34~4/22~12		
可抽/Pitch(mm)/线数范围/Poles	9.50/N=02~26P		
剥线长度/Stripping length(mm)	8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:

MAT NO: /

STATUS: work

APPD:

CHKD:

DRAFT: Desinly 2019.05.29

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG45S-B-XXP-1Y-00A(H)

DRAWING NO.: DG45S-C10

TYPE: CUSTOMER DRAWING

SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

SIZE	SIZE: A4	UNIT	UNIT: mm (inch)

REV	REV	TITLE