

FOR-1754 Rev.1.2





2

3

4


5

6

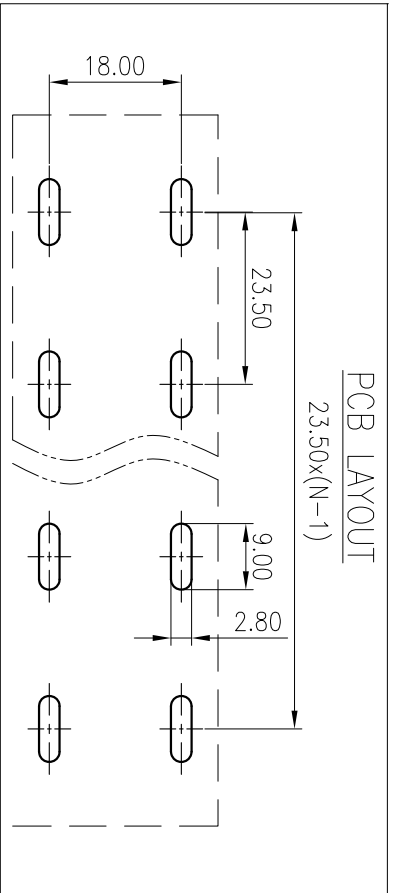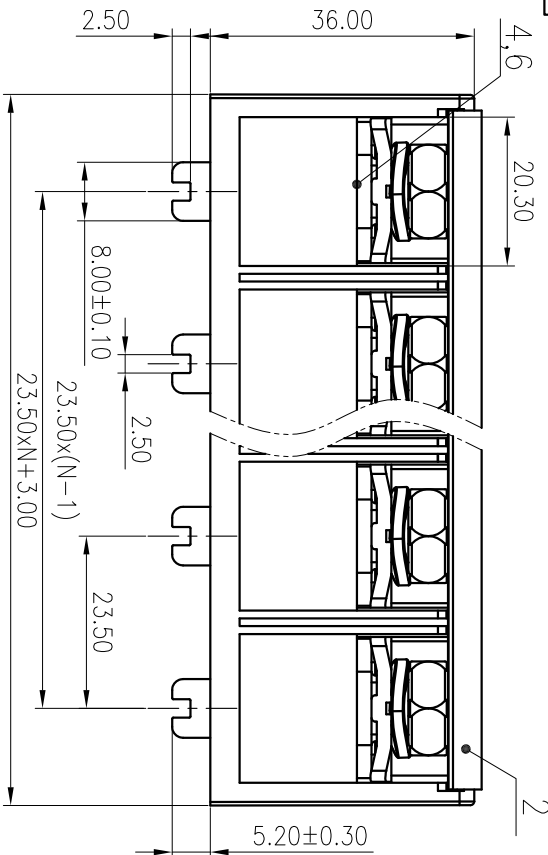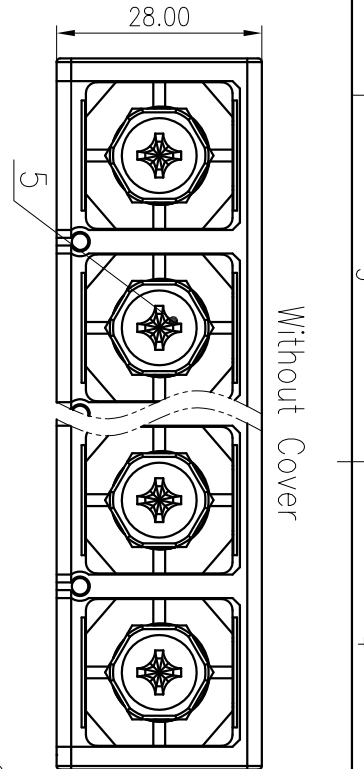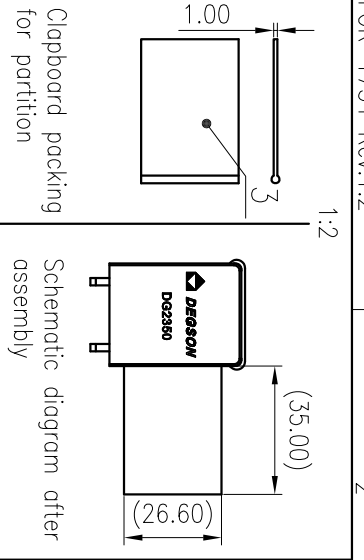

公差/差 (General tolerances/mm)		公差/差 (General tolerances/mm)	
0	>3	>6	>18
~2	~5	~10	~30
3	~6	~18	~50
~4	~10	~30	~80
~5	~18	~50	~120
~6	~30	~80	~180
~7	~50	~120	~250
~8	~80	~180	~315
~9	~120	~250	~400
~10	~180	~315	~500
~11	~250	~400	~630
~12	~315	~500	~800
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.43	±0.57
±0.80	±0.93	±1.05	±1.15
±1.60	±2.20	±2.50	±2.50
±2	±2	±2	±2

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	600/120	600/120	600/5
EC 标准/IEC Standard:	III/3	III/2	II/2
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	750/120	750/120	800/120
额定扭矩/扭矩 Tightening(N·m/Lb·in)	M8, 5.5/48.8		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	35.0~50.0/2~1/0		
间距/Pitch(mm)/线数范围/Poles	23.5/ N=2~6P		
剥线长度/Stripping length(mm)	20~21		
使用温度范围/Operating temperature(°C)	-40~+120		
符合RoHS环保要求/Conform to RoHS	Yes		

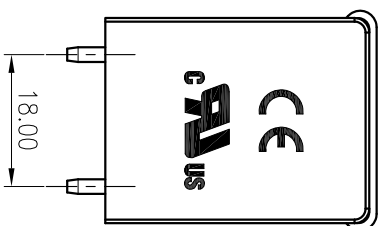

6	Nut	Steel	M8/Zn-Ni Plated
5	Screw	Steel	M8/Zn-Ni Plated
4	Pin header	Copper alloy	Sn Plated
3	Clapboard	PVC	/
2	Cover	PC	UL94V-2
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

MATERIAL: /

MAT NO: /

STATUS: /

APPD: /

CHKD: /

DRAFT: WU NK 2020.11.14

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 1:1

NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: 12000305

REV: T0

SHEET: 1/1

1

2

3

4

5

6