
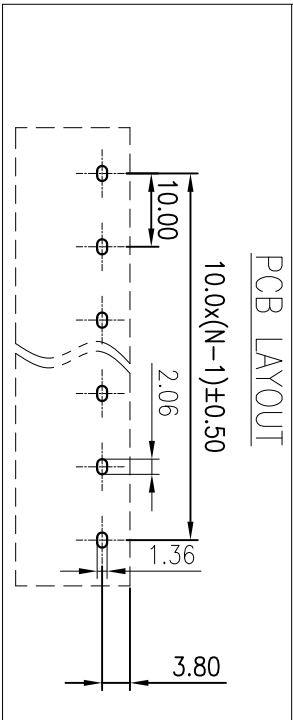

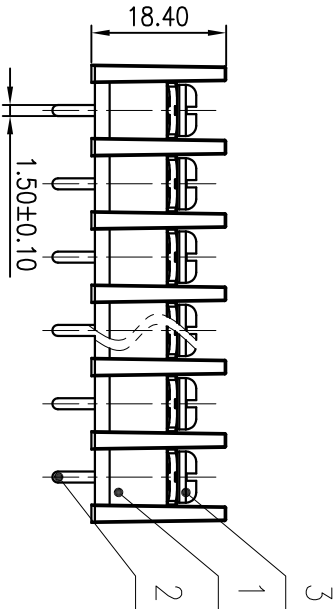



0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

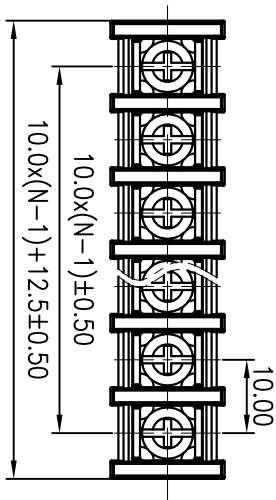

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	300/20	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	600/32	600/32	1000/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	6	6
额定扭矩/Torque Tightening(N·m/Lb·in)	M4, 1.2/10.53		
绞线范围(绞线)/Wire Range(flexible)(AWG)	22~12		
间距/Pitch(mm)/绞线范围(Poles)	10.00/N=02~26P		
绞线长度/Stripping length(mm)	9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: WU NK 2020.5.26

DRAWING NO.: DG55S-C01

TYPE: CUSTOMER DRAWING

PCB LAYOUT

10.0x(N-1)±0.50

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DRG55S-B-XXP-1Y-00A(H)

DRAWING NO.: DG55S-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV	ECN	DESCRIPTION	DRAFT	DATE