
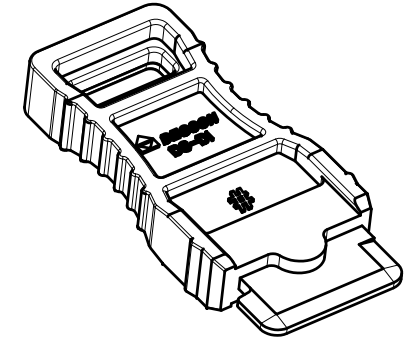
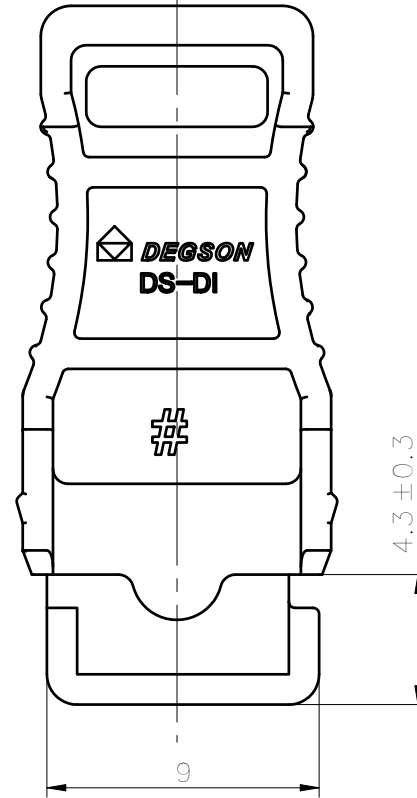
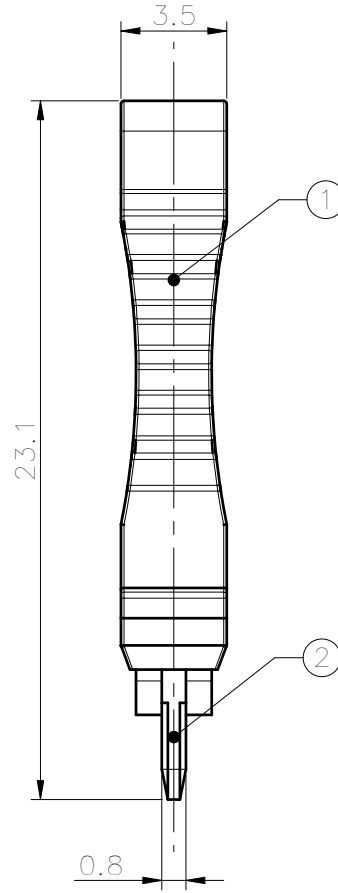
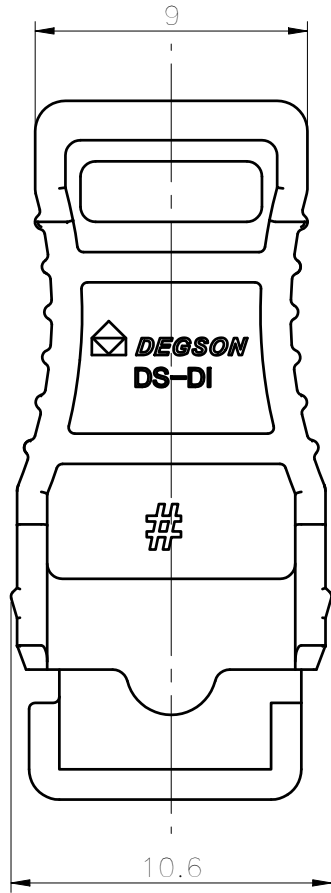


未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 /	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'
最大负载电流/Maximum load current(A)											20A			
使用温度范围/Operating temperature(°C)											-40~+105			
符合 RoHS 环保要求/Conform to RoHS											Yes			



2	Blade of Knife Switch	Copper	Sn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL: /		SURFACE: /					
		MAT. NO./REV: /		MAT STATUS: /					
APPD: Li GL	2022.05.11	NAME							
CHKD: Ma EK	2022.05.10	DS-DI-01P-1Y-00A(H)							
DRFT: Wang LX	2022.04.26								
REV	ECN	DESCRIPTION	DRFT	DATE	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
00	/	/	Wang LX	2022.04.26	/	CUSTOMER DRAWING	/	4:1	1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless written authorization is granted. All rights reserved for patent, utility model or designs registrations. 非经书面授权, 严禁禁止转让、复制、利用、交加本文件的内容。一经发现, 侵权必究。本公司保留对涉及发明、实用新型和外观设计的所有权利。